



PERSONAL
COMPUTERS



SMALL
COMPUTERS
NETWORK

Win Dialog Plus

400-800 VA
single-phase

Win Dialog Plus 400-800 VA



The **WIN DIALOG** series includes the 400-600-800VA models and uses digital technology. The load is powered from the mains through an AVR to stabilise brownout, sag and surge voltages, and EMI filters to suppress spikes and transients. When the mains fails, the load is powered by the inverter with a pseudo sinewave to provide sufficient runtime for computer system shutdown using the **PowerShield³** software supplied as standard.

CHARACTERISTICS

- Mains power supply stabilisation and filtering (technology with AVR and filters for atmospheric disturbance suppression)
- Integrated protection for PC networks and telephone line/modem connections RJ11/45


- Cold start capability: the UPS can power up without a mains supply present
- High reliability with built-in battery test feature
- Supplied with 2 output cables

ADVANCED COMMUNICATION

- Advanced, multi-platform communication for all operating systems and network environments: PowerShield³ monitoring and shut-down software included, with SNMP agent, for Windows 9x, ME, NT 4.0, 2000, XP, Vista and 2003 server; Mac OS X, Linux, and Unix operating systems.
- Advanced communication (standard USB interface)

2 YEAR WARRANTY

MODELS	WP 40U	WP 60U	WP 80U
POWER	400VA/240W	600VA/360W	800VA/480W
INPUT			
Rated voltage	220-240 Vac		
Voltage range	230 Vac (+20/-26%)		
Frequency	50/60 Hz auto sensing		
OUTPUT			
Voltage on mains operation	230 Vac (-8%, +10%)		
Voltage on battery operation	230 Vac (+/- 5%)		
Frequency on battery operation	50 or 60 Hz (+/- 0.5%)		
Waveform from battery/inverter	Pseudo sinewave		
BATTERIES			
Type	VRLA AGM Maintenance-free lead-acid		
Recharge time	6-8 h		
ENVIRONMENTAL			
Weight (kg)	5.8		6.2
Dimensions (hwd) (mm)	152 x 110 x 325		
Tel/Modem protection	RJ11/45 connectors		
Communication	USB		
Safety compliance	EN 62040-1-1 and Directives 73/23 EC, 93/68 EC, EN 62040-3		
EMC conformance	EN 62040-2 and Directives 2004/108 EC, 93/68 EC		
Marks	CE; GS/TÜV		
Operating temperature	0°C - 40°C		
Colour	Dark grey		
Altitude and relative humidity	6000 meters max. elevation, < 95% non condensing		
Accessories provided	2 output supply cables, communication software; user guide		

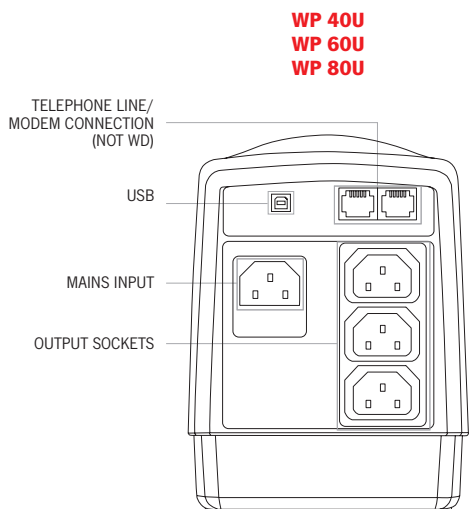

TECHNICAL DETAILS

